

CLASSIC COMFORT

T-4000 Wood Stove



THELIN
CO
INC

MANUFACTURER OF
PELLET, GAS & WOOD STOVES

12400 Loma Rica Drive ■ Grass Valley, CA 95945

530-273-1976

www.thelinco.com

PARLOUR T-4000 Wood Stove

The Parlour T-4000 Wood Stove is a remarkable heater for its size and shape. This EPA certified wood stove surpasses the strictest emission standards in the U.S. The particulate emission number is an amazing 3.62 grams per hour surpassing the EPA standard of 7.5 by almost 100%.

The technology used to create this clean burning stove does not require a catalytic combustor and the secondary combustion technology keeps the door glass clean and insures a safe, efficient fire that makes burning wood an economical and environmentally friendly heating source.

Features include an easy to use ash pan that is removable from either side of the stove and an optional blower for added efficiency and heat output.

The firebox will hold several pieces of 16" long wood or densified logs and the stove will burn all night on seasoned hardwood in the secondary burn mode.

Décor Options


Décor options include five (5) painted colors; charcoal, metallic black, metallic blue, sky blue, metallic brown and five (5) porcelain enamel colors; Ivory, Ebony black, Burgunday Red, Teal Green and Cobalt Blue. Metal trim options include 24 carat gold or nickel rings, door face and handle. A gold or nickel lid can be added as an option.

SPECIFICATIONS

- Height: 42" Foot Print: 20"
- Weight: 210# Door Opening: 9"x12"
- Diameter: 20" Flue Diameter: 6"
- Heating Capacity: 1200 –1500 Sq. Ft.*

**Heating Capacity depends upon environment, insulation and quality of fuel.*

DOOR OPTIONS

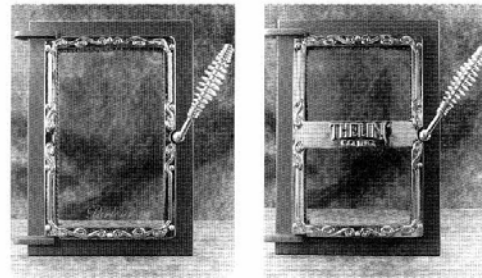

CLASSIC

TRADITIONAL

FREESTANDING INSTALLATION



TESTED TO UL 1482 Room Heater, Solid Fuel Type.

STANDARD RESIDENTIAL FREESTANDING INSTALLATIONS REQUIRE:

6" diameter, minimum 24 MSG black or 26 MSG blued steel connector, with listed (type UL103 HT) factory-built chimney, suitable for use with solid fuels or masonry chimney.

CLEARANCE REQUIREMENTS:	SINGLEWALL CONNECTOR RESIDENTIAL INSTALLATION	DOUBLEWALL CONNECTOR RESIDENTIAL/MOBILE HOME INSTALLATION	DOUBLEWALL CONNECTOR ALCOVE INSTALLATION
A. SIDEWALL TO UNIT	14.5" (368mm)	14.5" (368mm)	14.5" (368mm)
B. BACKWALL TO UNIT	13.0" (330mm)	13.0" (330mm)	13.0" (330mm)
C. CORNERWALL TO UNIT	10.0" (254mm)	10.0" (254mm)	N/A
D. SIDEWALL TO CONNECTOR	21.5" (546mm)	21.5" (546mm)	21.5" (546mm)
E. BACKWALL TO CONNECTOR	16.0" (406mm)	16.0" (406mm)	16.0" (406mm)
F. CORNERWALL TO CONNECTOR	19.0" (482mm)	19.0" (482mm)	N/A
G. FLOOR TO CEILING	84.0" (2134mm)	84.0" (2134mm)	96.0" (2438 mm)

MINIMUM CLEARANCES TO COMBUSTIBLES:



Authorized Dealer:

Blank space for the authorized dealer's name and address.